

UTILITY VAULT

3' x 3'



TANK DESIGN SPECIFICATIONS
CONFORMS TO LATEST: "STANDARD
SPECIFICATION FOR PRECAST CONCRETE
STRUCTURES ASTM DESIGNATION C913.

NOTES:

1. JOINT SEALANT IS BUTYL RUBBER MASTIC TYPE SEAL THAT CONFORMS TO LATEST AASHTO SPECIFICATION M-198. MEETS FEDERAL SPECIFICATION SS-S-0021(210-A).
2. REINFORCING STEEL CONFORMS TO LATEST ASTM SPECIFICATION A615.
3. CONCRETE COMPRESSIVE STRENGTH- 4000 PSI AT 28 DAYS.
4. METHOD OF MANUFACTURE: WET CAST.
5. BASE SECTION IS MONOLITHIC.
6. THE VAULT IS DESIGNED FOR HS-20 LOADING w/18" OF SOIL COVER.

WEIGHT CHART

PRODUCT	APPROX WEIGHT
BASE SLAB	1,350 LBS.
RISER	1,100 LBS./VFT.
ROOF SLAB	1,600 LBS.

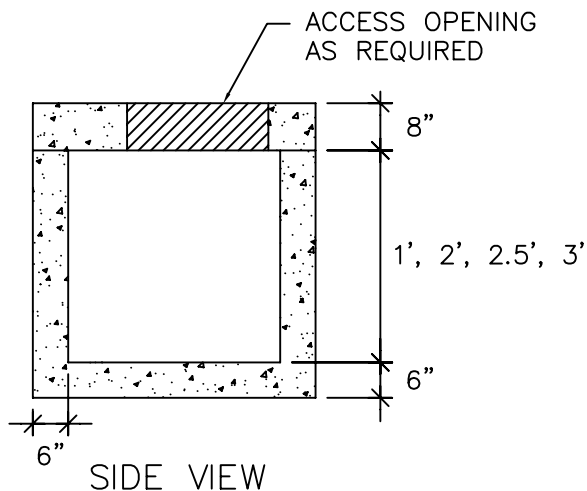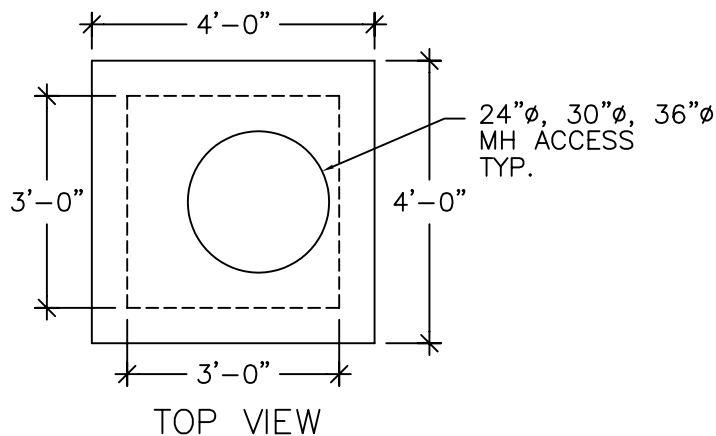

CUSTOM
OPENINGS
AS REQUIRED



UNITED CONCRETE PRODUCTS INC.

173 CHURCH STREET
YALESVILLE, CT 06492

TEL. 800 234-3119
(203) 269-3119

FAX. (203) 265-4941