


# 1250 GALLON REGULAR SEPTIC TANK

TANK DESIGN SPECIFICATION  
CONFORMS TO LATEST:  
ASTM DESIGNATION C1227

## NOTES:


1. JOINT SEALANT IS BUTYL RUBBER MASTIC TYPE SEAL THAT CONFORMS TO LATEST AASHTO SPECIFICATION M-198. MEETS FEDERAL SPECIFICATION SS-S-0021(210-A).
2. PIPE INLET AND OUTLET LOCATIONS HAVE POLYLOK II PIPE SEALS.
3. REINFORCING STEEL DEFORMED BARS CONFORM TO LATEST ASTM SPECIFICATION A615.
3. REINFORCING STEEL WELDED WIRE FABRIC CONFORM TO LATEST ASTM SPECIFICATION A185.
5. CONCRETE COMPRESSIVE STRENGTH- 4000 PSI AT 28 DAYS.
6. METHOD OF MANUFACTURE: WET CAST.
7. SECTIONS ARE MONOLITHIC.

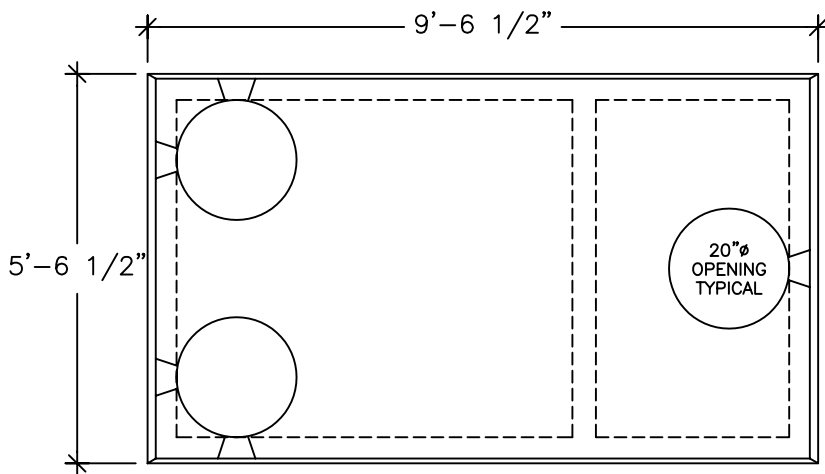

TOP VIEW  
(COVERS AND RISERS REMOVED)

## WEIGHT CHART

| PRODUCT | APPROX WEIGHT |
|---------|---------------|
| TANK    | 12100 LBS.    |

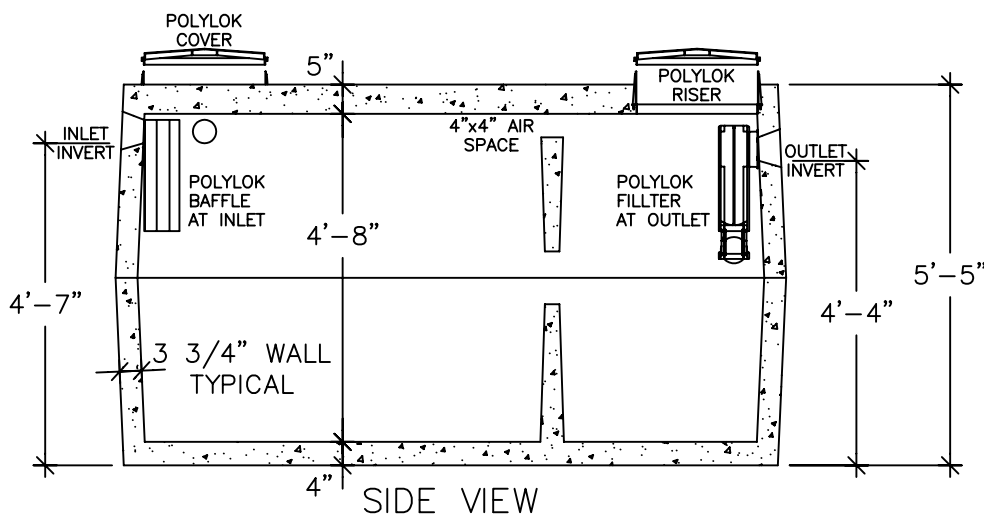

SIDE VIEW



**UNITED CONCRETE PRODUCTS INC.**

173 CHURCH STREET  
YALESVILLE, CT 06492

TEL. 800 234-3119  
(203) 269-3119

FAX. (203) 265-4941