


# 2,000 GALLON HS-20 SEPTIC TANK

TANK DESIGN SPECIFICATIONS  
CONFORMS TO LATEST:  
ASTM DESIGNATION C1227


NOTES:

1. JOINT SEALANT IS BUTYL RUBBER MASTIC TYPE SEAL THAT CONFORMS TO LATEST AASHTO SPEC. M-198.
4. REINFORCING STEEL DEFORMED BARS CONFORM TO LATEST ASTM SPEC. A706, GRADE 60,
- COVER  $1\frac{1}{2}$ ", UNLESS NOTES.
5. CONCRETE COMPRESSIVE STRENGTH-5,000 PSI AT 28 DAYS SELF CONSOLIDATING CONCRETE.
6. METHOD OF MANUFACTURE: WET CAST.
7. BOTTOM SECTION IS MONOLITHIC.
8. DESIGNED FOR AASHTO HS-20 LOADING WITH 6" to 48" OF SOIL COVER.
9. ALL PIPING PROVIDED AND INSTALLED BY CONTRACTOR.
10. LIFTING - LIFTING LOOPS IN ROOF SLING LIFTING NOTCHED IN BASE SECTION

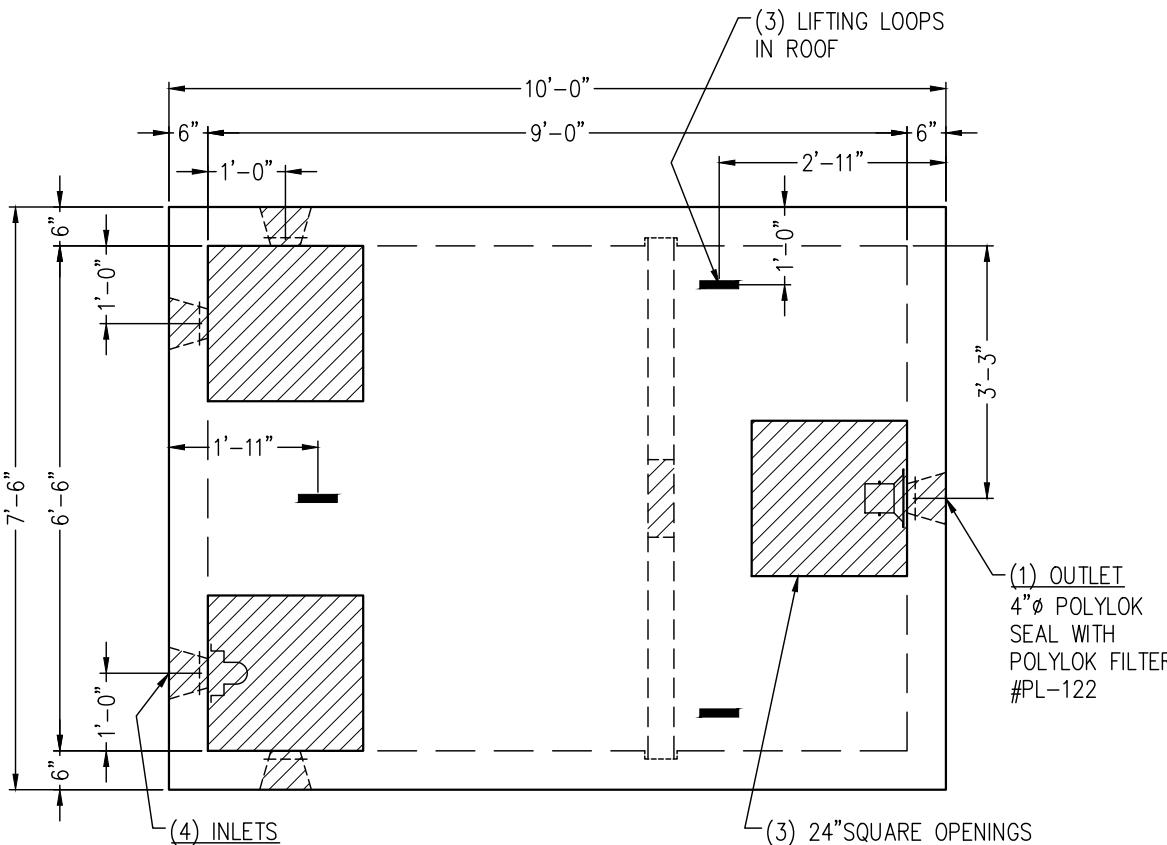

TOP VIEW

WEIGHT CHART	
PRODUCT	APPROX. WEIGHT
TANK W/BAFFLE	30,500 LBS.

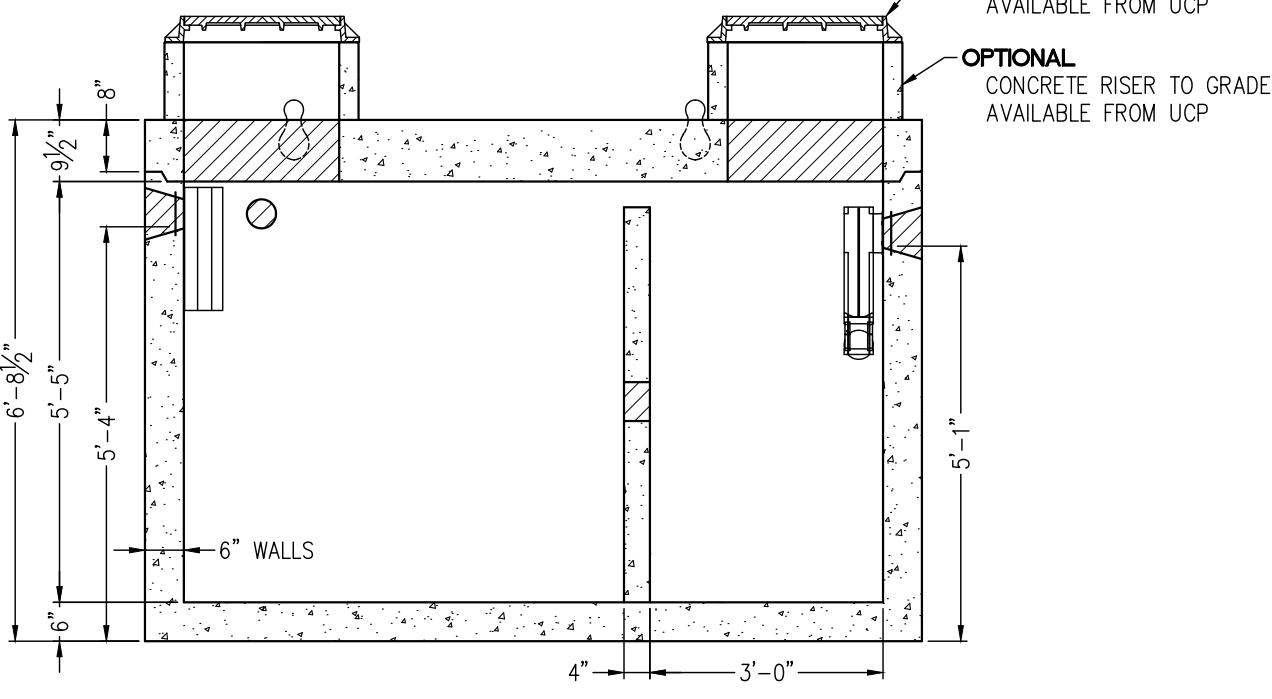

ELEV. SECTION



**UNITED CONCRETE PRODUCTS INC.**

173 CHURCH STREET  
YALESVILLE, CT 06492

TEL. (800) 234-3119  
TEL. (203) 269-3119

FAX. (203) 265-4941  
[WWW.UNITEDCONCRETE.COM](http://WWW.UNITEDCONCRETE.COM)