

2200 GALLON HS-20 DRY WELL


GALLEY DESIGN SPECIFICATIONS
CONFORMS TO LATEST:
ASTM DESIGNATION C913

NOTES:


1. PIPE INLET LOCATIONS HAVE 4" DIAMETER KNOCKOUTS, TYPICAL. CUSTOM KNOCKOUTS CAN BE CAST ON REQUEST.
2. REINFORCING STEEL DEFORMED BARS CONFORM TO LATEST ASTM SPECIFICATION A706, GRADE 60.
3. CONCRETE COMPRESSIVE STRENGTH - 4000 PSI AT 28 DAYS SELF COMPACTING CONCRETE MIX.
4. METHOD OF MANUFACTURE: WET CAST.
5. EACH SECTION IS MONOLITHIC.
6. DESIGNED FOR HS-20 LOADING.

24" SQUARE
INSPECTION
OPENING
CENTERED

7½"x5" DEEP
CROSS BEAM AT
TOP OF BOTTOM
HALF

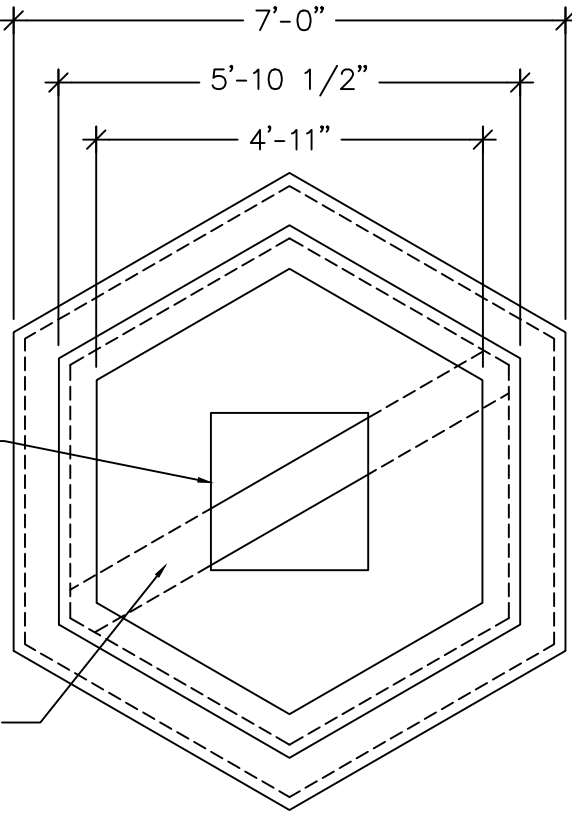

TOP VIEW
(ROOF SLAB THICKNESS IS 6")

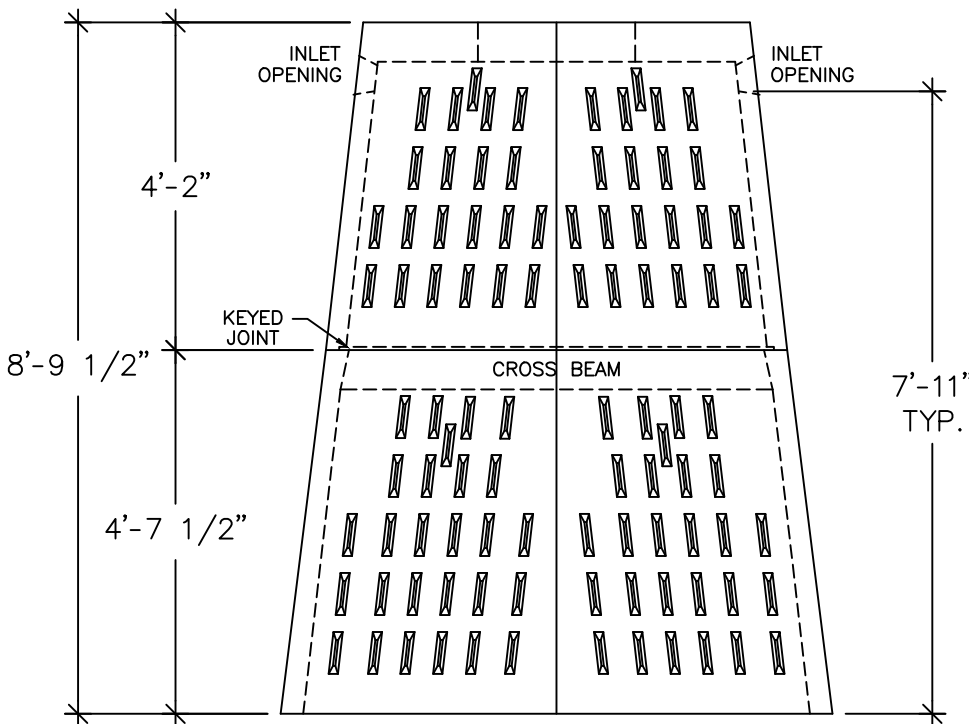

SIDE VIEW
(WALL THICKNESS IS 3")

WEIGHT CHART

PRODUCT	APPROX WEIGHT
2200 GALLON DRY WELL	6800 LBS.

LEACHING DATA

FLOW LINE (INCHES)	INSIDE CAPACITY (GALLONS)
7'-9"	2200



UNITED CONCRETE PRODUCTS INC.

173 CHURCH STREET
YALESVILLE, CT 06492

TEL. 800 234-3119
(203) 269-3119

FAX. (203) 265-4941