
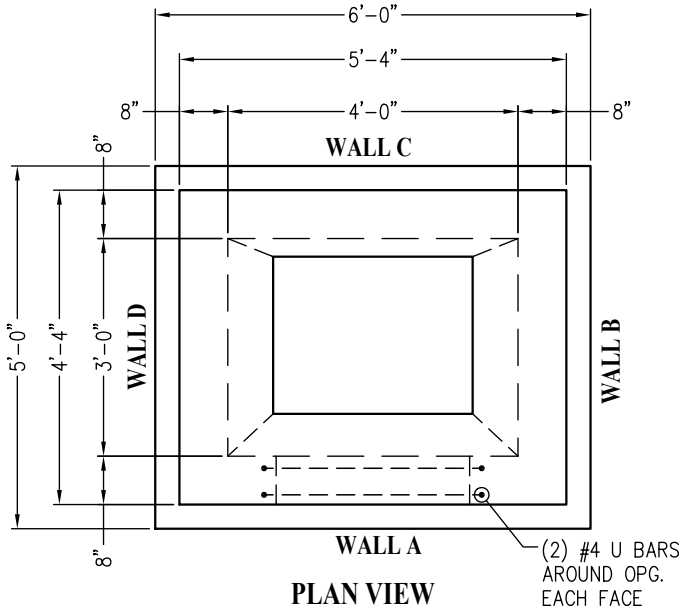



CTDOT TYPE C CATCH BASIN COMPONENTS OVER 10'




NOTES:

1. JOINT SEALANT IS BUTYL RUBBER MASTIC TYPE SEAL THAT CONFORMS TO LATEST AASHTO SPECIFICATION SPECIFICATION SS-S-0021(210-A).
2. REINFORCING STEEL DEFORMED BARS CONFORM TO LATEST ASTM SPECIFICATION A615, GRADE 60 MIN. COVER 2" UNLESS NOTED.
3. CONCRETE COMPRESSIVE STRENGTH- 4,000 PSI AT 28 DAYS, SELF COMPACTING CONCRETE MIX.
4. METHOD OF MANUFACTURE: WET CAST.
5. SUMP SECTION IS MONOLITHIC.
6. CONFORMS TO CTDOT STANDARD SHEET #HW-507_04, DATED 9-18-2009



WEIGHT CHART

PRODUCT	APPROX. WEIGHT
8" WALL RISER	1,700 LBS./LF
12" WALL RISER	2,800 LBS./LF
SUMP SECTION	6,600 LBS.

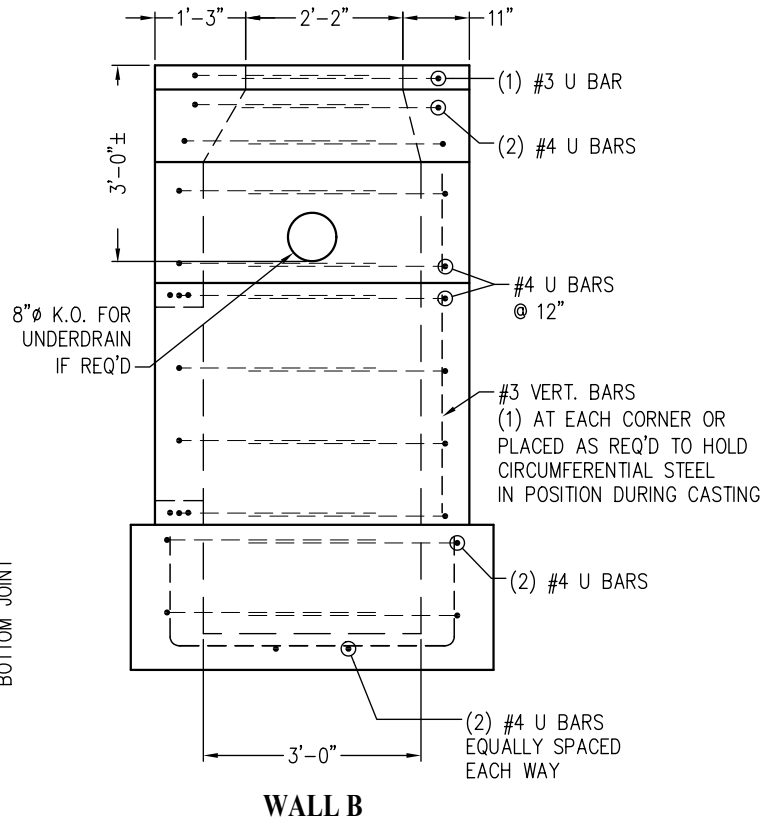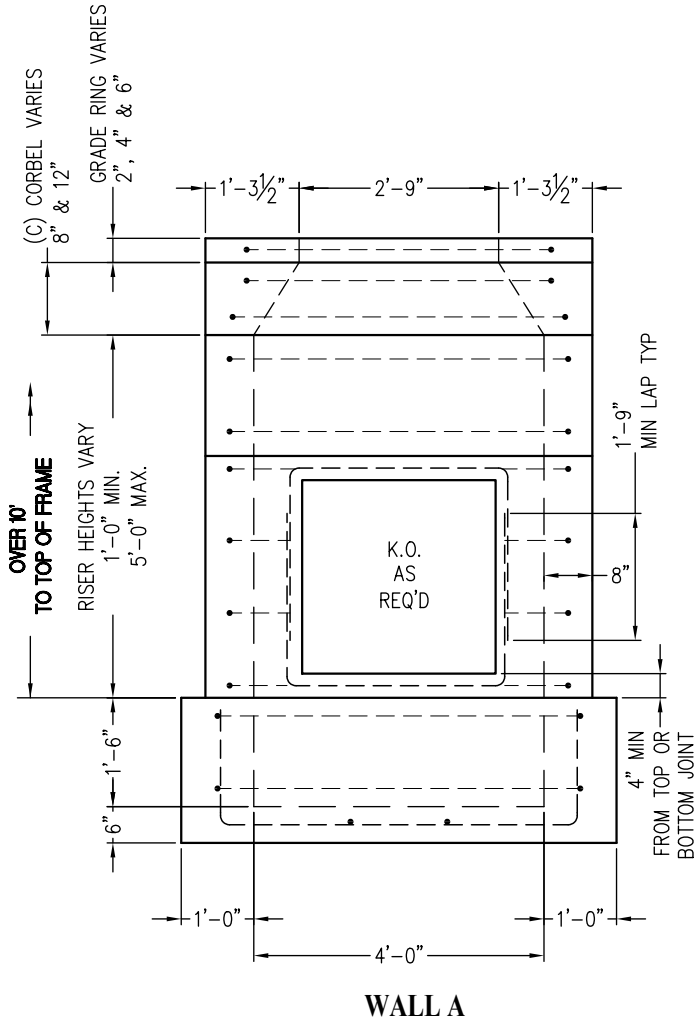

UNITED CONCRETE PRODUCTS INC.

173 CHURCH STREET
YALESVILLE, CT 06492

TEL. (800) 234-3119
TEL. (203) 269-3119

FAX. (203) 265-4941
WWW.UNITEDCONCRETE.COM