


# CATCH BASIN CONVERSION SLAB

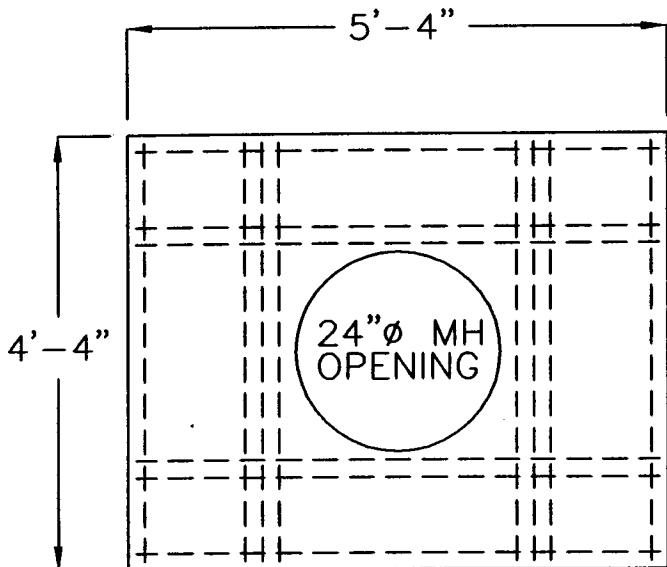

DESIGN CONFORMS TO CDOT  
AND LOCAL SPECIFICATIONS.

## NOTES:

1. REINFORCING STEEL DEFORMS BARS CONFORM TO LATEST ASTM SPECIFICATION A615.
2. CONCRETE COMPRESSIVE STRENGTH - 4,000 PSI @ 28 DAYS.
3. METHOD OF MANUFACTURE: WET CAST.
4. DESIGN LOAD: AASHTO H-20

## WEIGHT CHART

PRODUCT	APPROX WEIGHT
CONVERSION SLAB	1,700 LBS.

## REINFORCING STEEL

#4 BAR @ 12" O.C. EACH WAY BOTTOM

ADD'L #4 BAR AROUND OPENING



**UNITED CONCRETE PRODUCTS INC.**

173 CHURCH STREET  
YALESVILLE, CT 06492

TEL. 800 234-3119  
(203) 269-3119

FAX. (203) 265-4941