

CATCH BASIN GRADE RINGS


DESIGN COMFORMS TO CDOT
AND LOCAL SPECIFICATIONS.

NOTES:

1. REINFORCING STEEL DEFORMED BARS CONFORM TO LATEST ASTM SPECIFICATION A615.
2. CONCRETE COMPRESSIVE STRENGTH— 4000 PSI AT 28 DAYS.
3. METHOD OF MANUFACTURE: WET CAST.
4. SECTION IS MONOLITHIC.
5. DESIGN LOAD: AASHTO H-20

WEIGHT CHART


PRODUCT	APPROX WEIGHT
2" CORBEL GRADE RING	310 LBS.
4" CORBEL GRADE RING	620 LBS.
6" CORBEL GRADE RING	930 LBS.
12" CORBEL GRADE RING	1860 LBS.

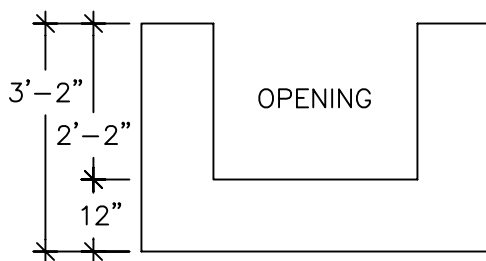

TOP PLAN VIEW

HEIGHTS AVAILABLE:
2", 4", 6", 12"

MODEFIED GRADE RING

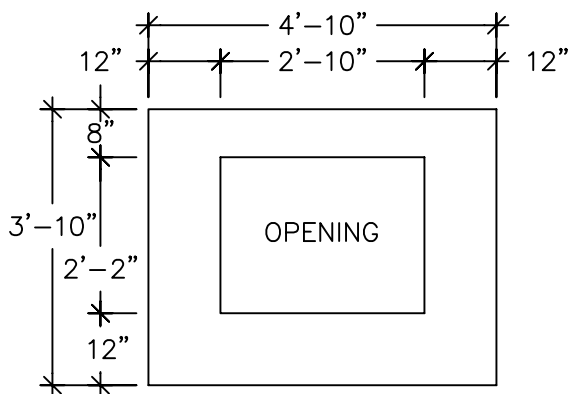

TOP PLAN VIEW

HEIGHTS AVAILABLE:
2", 4", 6", 12"

STANDARD GRADE RING



UNITED CONCRETE PRODUCTS INC.

173 CHURCH STREET
YALESVILLE, CT 06492

TEL. 800 234-3119
(203) 269-3119

FAX. (203) 265-4941