
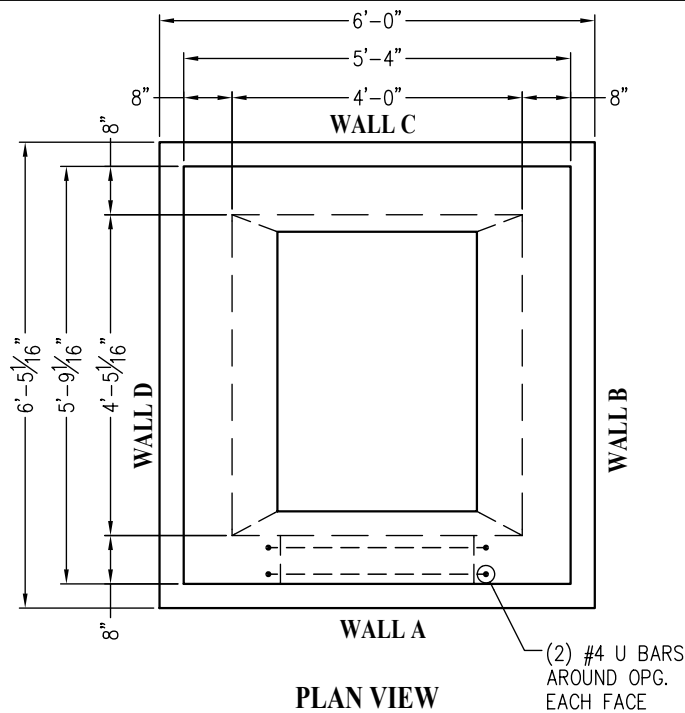
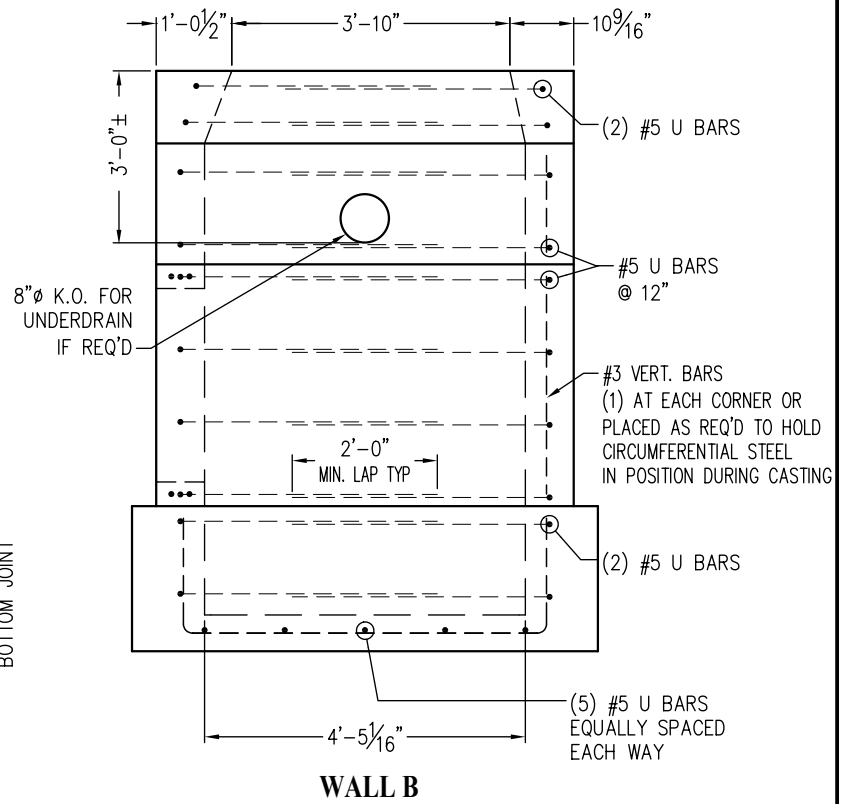


# CTDOT TYPE C DOUBLE GRATE TYPE I CATCH BASIN COMPONENTS OVER 10'

## NOTES:

1. JOINT SEALANT IS BUTYL RUBBER MASTIC TYPE SEAL THAT CONFORMS TO LATEST AASHTO SPECIFICATION SPECIFICATION SS-S-210(210-A).
2. REINFORCING STEEL DEFORMED BARS CONFORM TO LATEST ASTM SPECIFICATION A615, GRADE 60 MIN. COVER 2" UNLESS NOTED.
3. CONCRETE COMPRESSIVE STRENGTH- 4,000 PSI AT 28 DAYS, SELF COMPACTING CONCRETE MIX.
4. METHOD OF MANUFACTURE: WET CAST.
5. SUMP SECTION IS MONOLITHIC.
6. CONFORMS TO CTDOT STANDARD SHEET #HW-507\_05, DATED 9-18-2009

| WEIGHT CHART   |                |
|----------------|----------------|
| PRODUCT        | APPROX. WEIGHT |
| 8" WALL RISER  | 2,100 LBS./LF  |
| 12" WALL RISER | 3,300 LBS./LF  |
| SUMP SECTION   | 7,900 LBS.     |

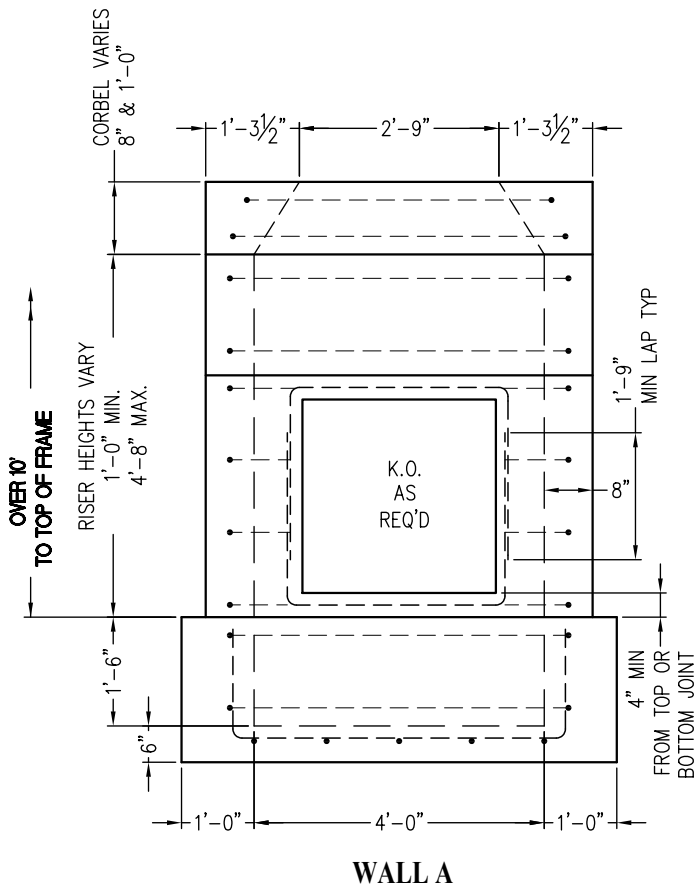

**UNITED CONCRETE PRODUCTS INC.**

173 CHURCH STREET  
YALESVILLE, CT 06492

TEL. (800) 234-3119  
TEL. (203) 269-3119

FAX. (203) 265-4941  
WWW.UNITEDCONCRETE.COM