
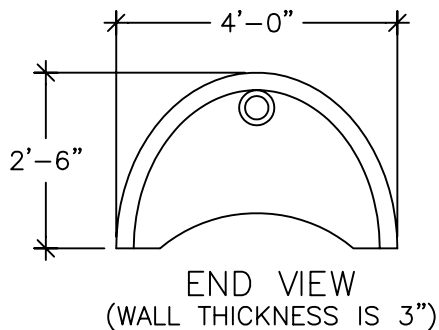
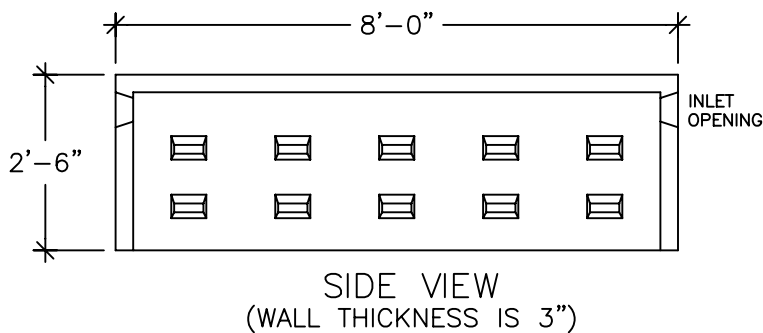


"IGLOO" GALLEY HS-20 LEACHING CHAMBER

GALLEY DESIGN SPECIFICATIONS
CONFORMS TO LATEST:
ASTM DESIGNATION C913

NOTES:

1. PIPE INLET AND OUTLET LOCATIONS HAVE POLYLOK II PIPE SEALS, TYPICAL. CUSTOM KNOCKOUTS CAN BE CAST ON REQUEST.
2. REINFORCING STEEL DEFORMED BARS CONFORM TO LATEST ASTM SPECIFICATION A615.
3. CONCRETE COMPRESSIVE STRENGTH- 4000 PSI AT 28 DAYS.
4. METHOD OF MANUFACTURE: WET CAST.
5. SECTION IS MONOLITHIC.
6. THE CHAMBER IS DESIGNED FOR HS-20 LOADING w/18" OF SOIL COVER.

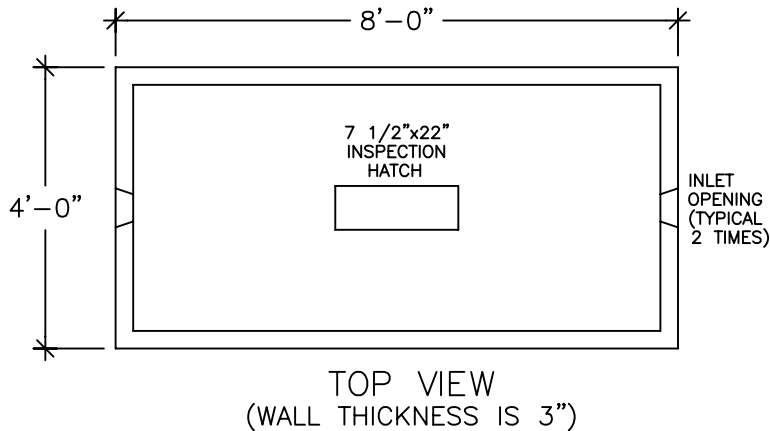

WEIGHT CHART

PRODUCT	APPROX WEIGHT
"IGLOO" GALLEY	2400 LBS.

LEACHING DATA

FLOW LINE (INCHES)	LEACHING (Gall/LF)	LEACHING (FT ² /UNIT)	INSIDE CAPACITY (GALLONS)
22	7.4	59.2	350



UNITED CONCRETE PRODUCTS INC.

173 CHURCH STREET
YALESVILLE, CT 06492

TEL. 800 234-3119
(203) 269-3119

FAX. (203) 265-4941