


TYPE II CATCH BASIN TOPS


DESIGN CONFORMS TO CDOT
AND LOCAL SPECIFICATIONS.

NOTES:


1. REINFORCING STEEL DEFORMED BARS CONFORM TO LATEST ASTM SPECIFICATION A615/A706, GRADE 60.
2. CONCRETE COMPRESSIVE STRENGTH— 4000 PSI AT 28 DAYS.
3. METHOD OF MANUFACTURE: WET CAST.
4. SECTION IS MONOLITHIC.
5. PAINTED OR GALVANIZED, TYPE A OR B GRATES ARE AVAILABLE.

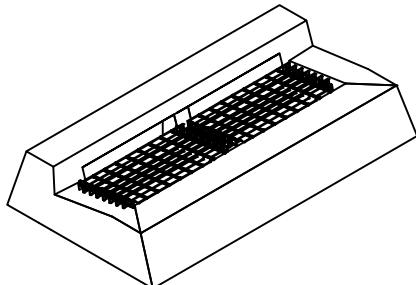


TYPE 'C' CONC CURB

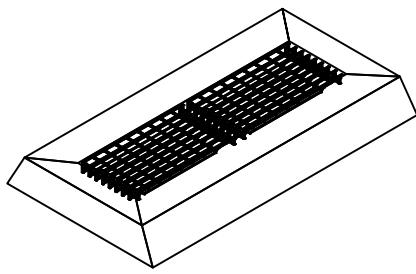

TYPE 'C-L'

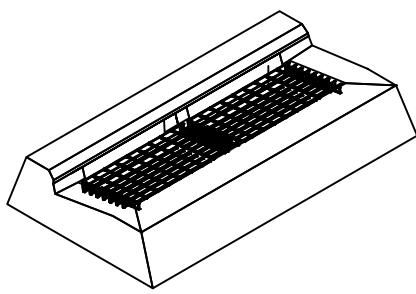

PARK CURB

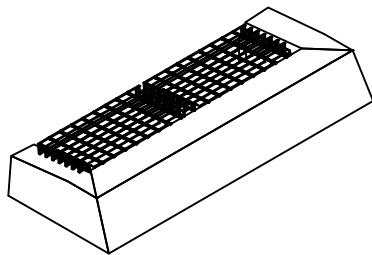

BARRIER TOP



UNITED CONCRETE PRODUCTS INC.

173 CHURCH STREET
YALESVILLE, CT 06492

TEL. 800 234-3119
(203) 269-3119

FAX. (203) 265-4941