


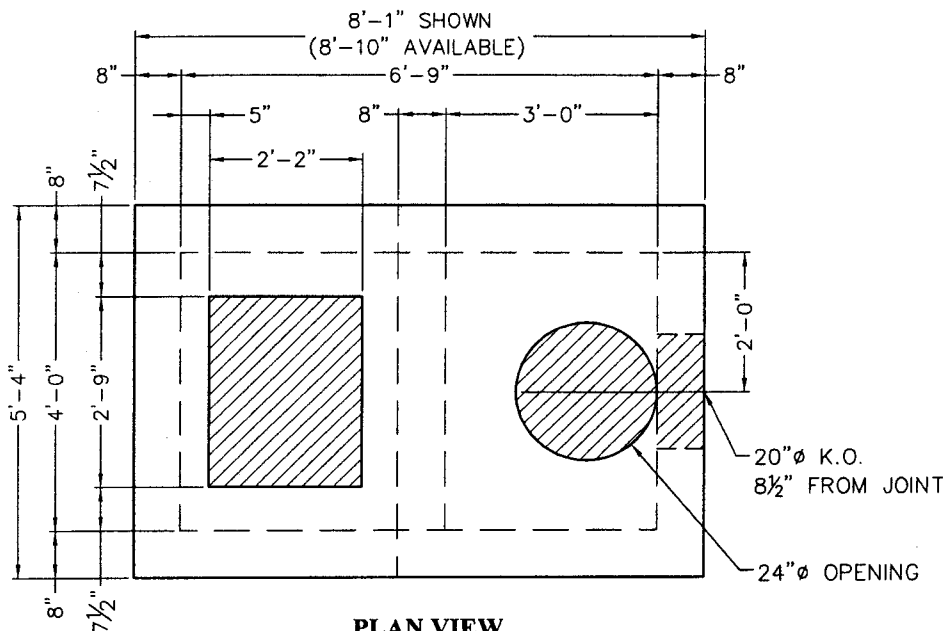


PLAN VIEW
(SHOWN W/O CATCH BASIN)


- NOTES:**
1. REINFORCING STEEL WELDED WIRE FABRIC CONFORM TO LATEST ASTM SPECIFICATION A185.
 2. REINFORCING STEEL DEFORMED BARS CONFORM TO LATEST ASTM SPECIFICATION A615, GRADE 60.
 3. CONCRETE COMPRESSIVE STRENGTH- 4,000 PSI AT 28 DAYS SELF COMPACTING CONCRETE MIX.
 4. METHOD OF MANUFACTURE: WET CAST.
 5. DESIGN LOAD: AASHTO H-20

WEIGHT CHART

PRODUCT	APPROX. WEIGHT
CATCH BASIN	1,700 LBS.
8" TOP SLAB	3,400 LBS.
TRANSITION RISER	6,700 LBS.
STD RISER	6,800 LBS.
SUMP	4,900 LBS.

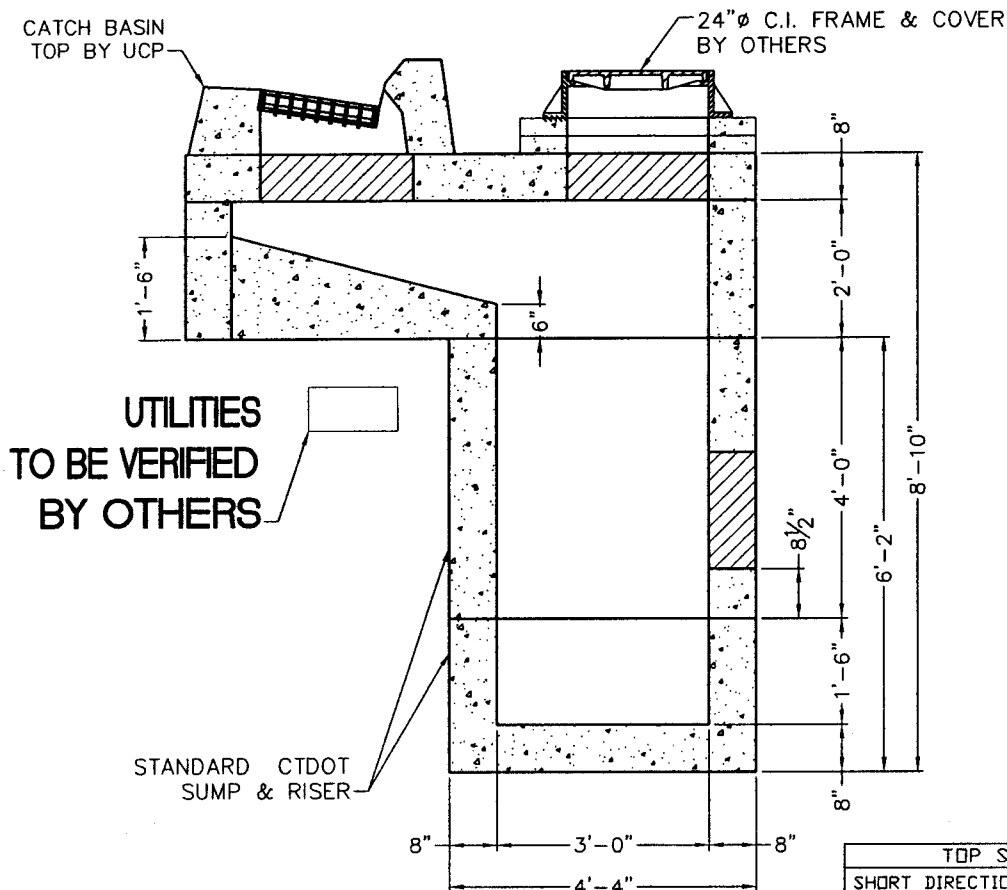

CROSS SECTION

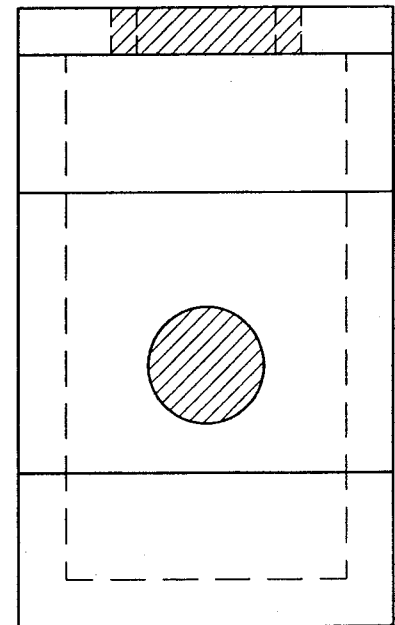

END VIEW

TOP SLAB REINFORCING	
SHORT DIRECTION	#5 @ 6' O.C., 1 1/2' COVER FROM BOT. OF SLAB
LONG DIRECTION	#4 @ 8' O.C.
OFFSET RISER REINFORCING	
HORIZ. DIRECTION	#4 @ 12' O.C., 1 1/2' COVER FROM O.S. OF WALL
VERT. DIRECTION	#4 @ 12' O.C.

UNITED CONCRETE PRODUCTS, Inc.

173 CHURCH STREET
YALESVILLE, CT 06492
TEL: (203)-269-3119
FAX: (203)-265-4941

OFFSET CATCH BASIN TYPICAL

CUSTOMER	XXXX	SCALE	NONE
JOB	XXXX	DATE	XXXX
LOCATION	XXXX	DRW	DH
		CHK	JLT
			SHEET
			TYP