




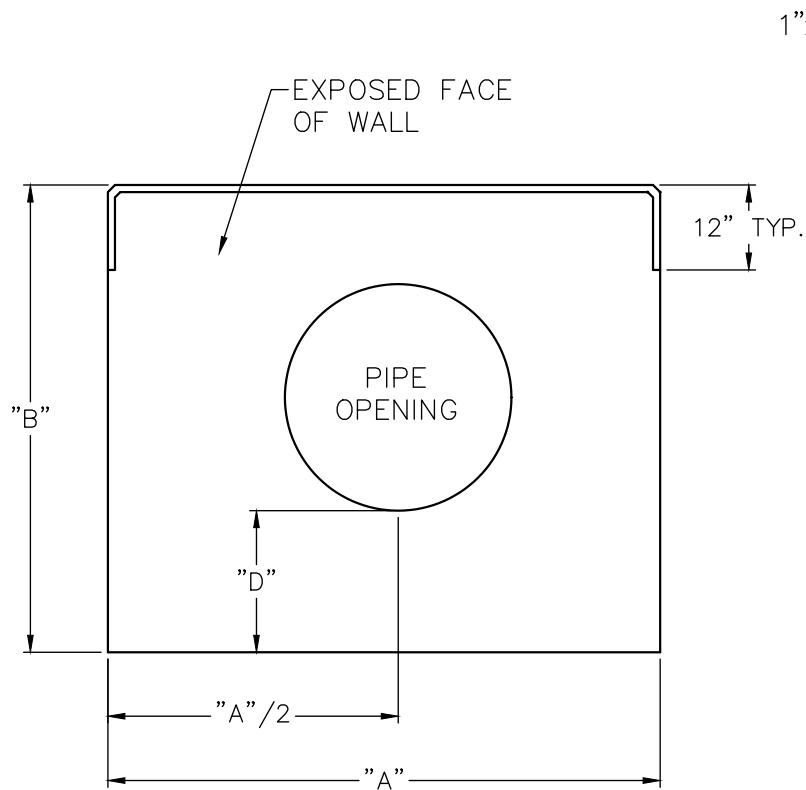

FRONT VIEW

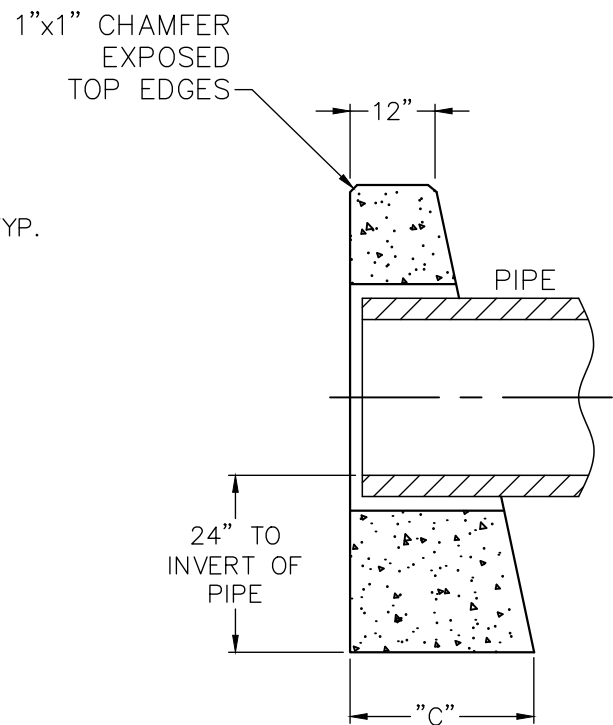


SIDE VIEW



STANDARD ENDWALL

NOTES:

1. REINFORCING STEEL DEFORMED BARS CONFORM TO LATEST ASTM SPECIFICATION A615/A706, GRADE 60.
2. CONCRETE COMPRESSIVE STRENGTH- 4,000 PSI AT 28 DAYS
SELF COMPACTING CONCRETE MIX.
3. METHOD OF MANUFACTURE: WET CAST.
4. CONFORMS TO CTDOT STANDARD DRAWING #506.

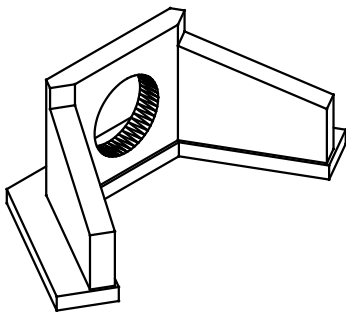

**CUSTOM ENDWALL
w/WINGWALLS AVAILABLE
UPON REQUEST**

STANDARD ENDWALLS							
	PIPE SIZE	OPG. SIZE	A	B	C	D	WEIGHT
IN STOCK ITEM	12" RCP	20"Ø	54"	54"	24"	20"	4600 LBS.
IN STOCK ITEM	15" RCP	24"Ø	66"	57"	24"	19½"	5300 LBS.
IN STOCK ITEM	18" RCP	26"Ø	78"	60"	25"	20"	7000 LBS.
IN STOCK ITEM	24" RCP	32"Ø	102"	66"	26"	20"	10200 LBS.
	30" RCP	42"Ø	126"	72"	27"	20"	13600 LBS.
	36" RCP	48"Ø	150"	78"	32"	18"	19400 LBS.
	42" RCP	54"Ø	174"	84"	33"	18"	25000 LBS.
	48" RCP	62"Ø	198"	90"	36"	17"	32000 LBS.



UNITED CONCRETE PRODUCTS INC.

173 CHURCH STREET
YALESVILLE, CT 06492

TEL. 800 234-3119
(203) 269-3119

FAX. (203) 265-4941