


REINFORCED CONCRETE PIPE

IN STOCK SIZES

(Storm Drain Only)

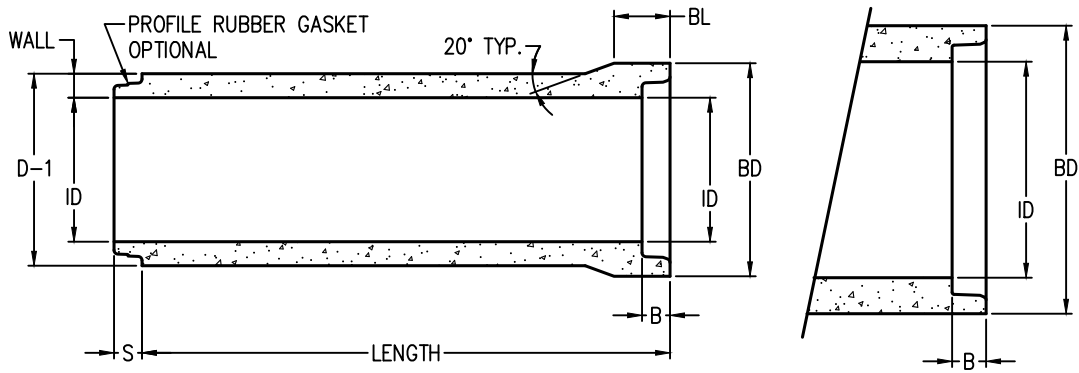

BELL END
42" to 60" PIPE

SIZE (ID)	WALL (in)	LENGTH	BL (in)	B (in)	S (in)	D-1 (in)	BD (in)	TONS/8' LG	LBS/8' LG
12	2	8'-0"	6 1/2	3 1/2	3 1/2	16	19 5/8	.41	820
15	2 1/4	8'-0"	6 1/2	3 1/2	3 1/2	19 1/2	23 1/8	.57	1,130
18	2 1/2	8'-0"	6 1/2	3 1/2	3 1/2	23	26 5/8	.74	1,480
24	3	8'-0"	7	3 1/2	3 1/2	30	32 5/8	1.14	2,270
30	4 1/4	8'-0"	5 1/2	3 1/2	3 1/2	38 1/2	42 1/2	2.03	4,060
36	4 3/4	8'-0"	7	4 1/4	3 1/2	45 1/2	50 1/4	2.75	5,490
42	4 1/2	8'-0"	—	4 1/4	4 1/4	51	51	2.83	5,660
48	5 3/4	8'-0"	—	4 1/4	4 1/4	59 1/2	59 1/2	4.12	8,240
60	6 3/4	8'-0"	—	4 3/4	4 3/4	73 1/2	73 1/2	6.06	12,120

12" WALL B - CLASS IV & V

15" WALL B - CLASS IV & V

18" WALL B - CLASS IV & V

24" WALL B - CLASS IV & V

30" WALL C - CLASS IV & V

36" WALL C - CLASS IV & V

42" WALL B - CLASS IV

48" WALL C - CLASS IV

60" WALL C - CLASS IV

PIPE CONFORMS TO - ASTM C76 & C443
(Storm Drain Only)



UNITED CONCRETE PRODUCTS INC.

173 CHURCH STREET
YALESVILLE, CT 06492

TEL. (800) 234-3119
TEL. (203) 269-3119

FAX. (203) 265-4941
WWW.UNITEDCONCRETE.COM